


KVX-B

Powerful. High Precision. Reliable

▶ Servo Planetary Gearbox


Advanced Gearbox Solution

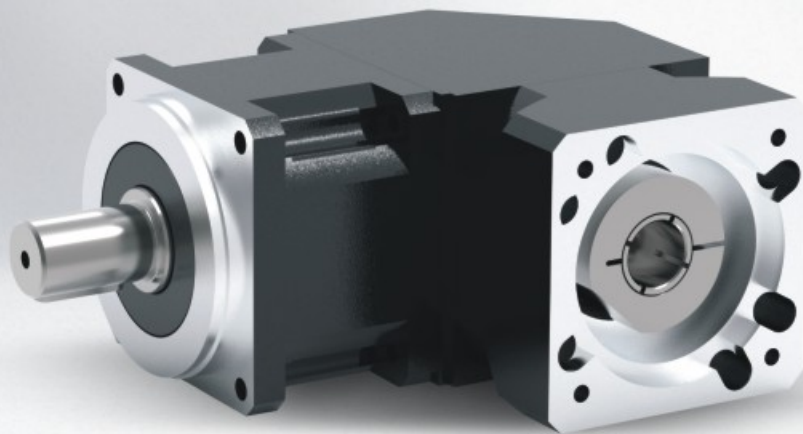




Helical Gear System Technology

Thanks to the tooth to tooth compact ratio more than 60%. The helical gearing and full needle bearing bring the benefits including higher torque capacity, smooth and lower noise running, decreased backlash and higher efficiency. Integrated housing engineering with super skiving gearing tooling craft.

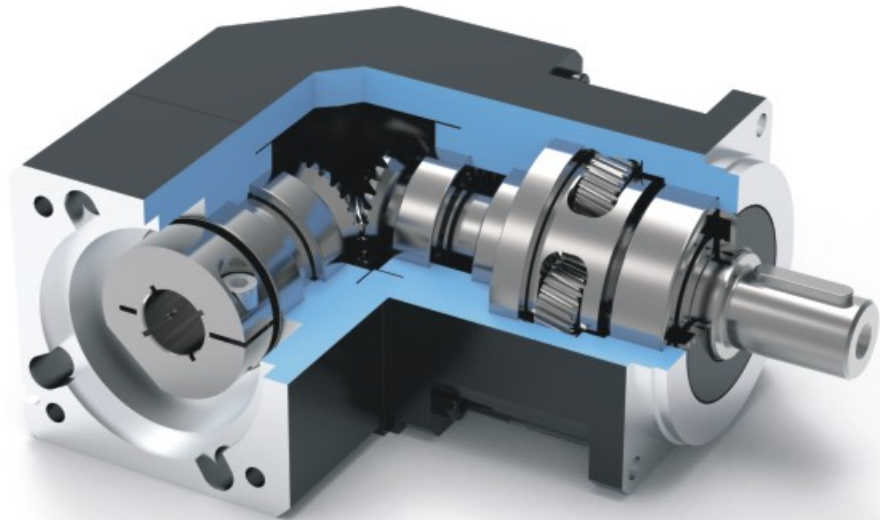



Master CageSpindle Planetary Carrier

The patented Master CageSpindle integrated planetary carrier support planetary gearbox to increase constructional strength running stability and rigidity significantly. Synthetic grease lubrication allows maintenance free for gearbox whole service life.

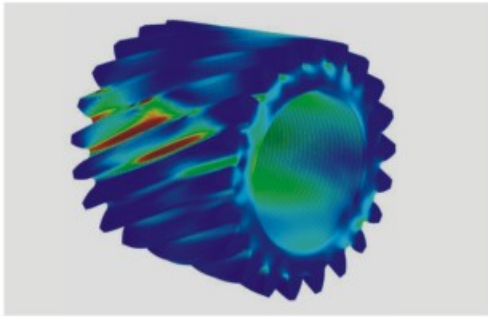

Super Gear Grinding and Heat Treatment Technology

The global leading gear grinding technology brings the great improvement for the tooth profile optimization, with the high level carburizing and quenching heat treatment technology to reach high precision and gear harden performance.

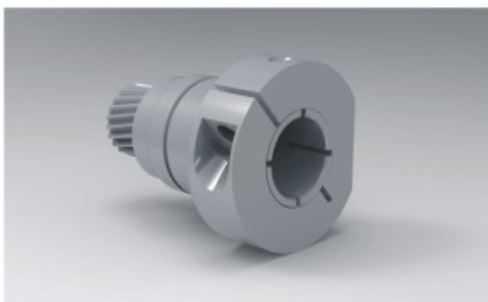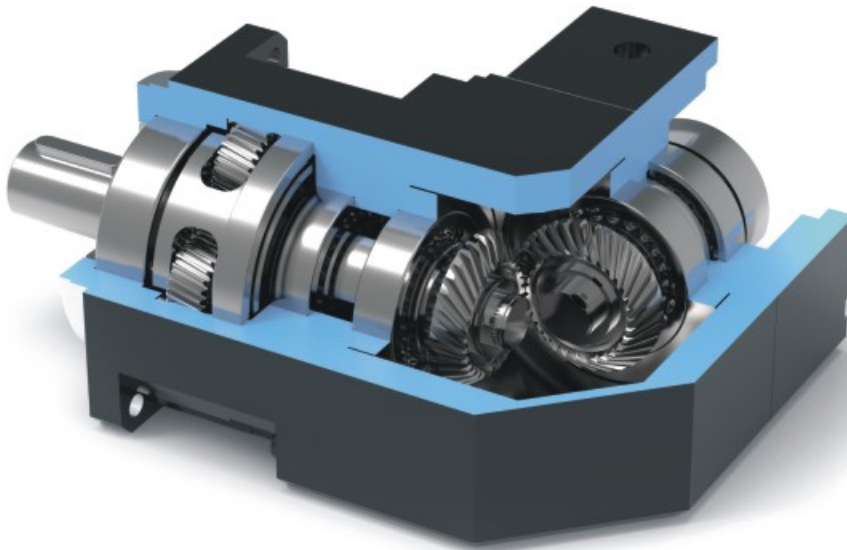

Dynamic Balance Clamping and Sealing System

For the gearbox input dynamic balance clamping design with perfect concentricity to decrease backlash and increase gearbox operation stability. The ultra sealing system offers grease leakage protection and support gearbox to reach IP65.

KVX-B Series Servo Planetary Gearbox

Order Instructions

Order Code:

KVX-B — 120 — 02 — 015 — S1 — P0 — Servo Motor



KVX-B

Gearbox Series: KVX-B



120

Gearbox Size



02

Gearbox Stage



015

Gearbox Ratio



S1

S1: Output shaft with key
S2: Output shaft without key



P0


Gearbox Precision



Servo Motor

Motor Manufacturer and model

Technical Memo

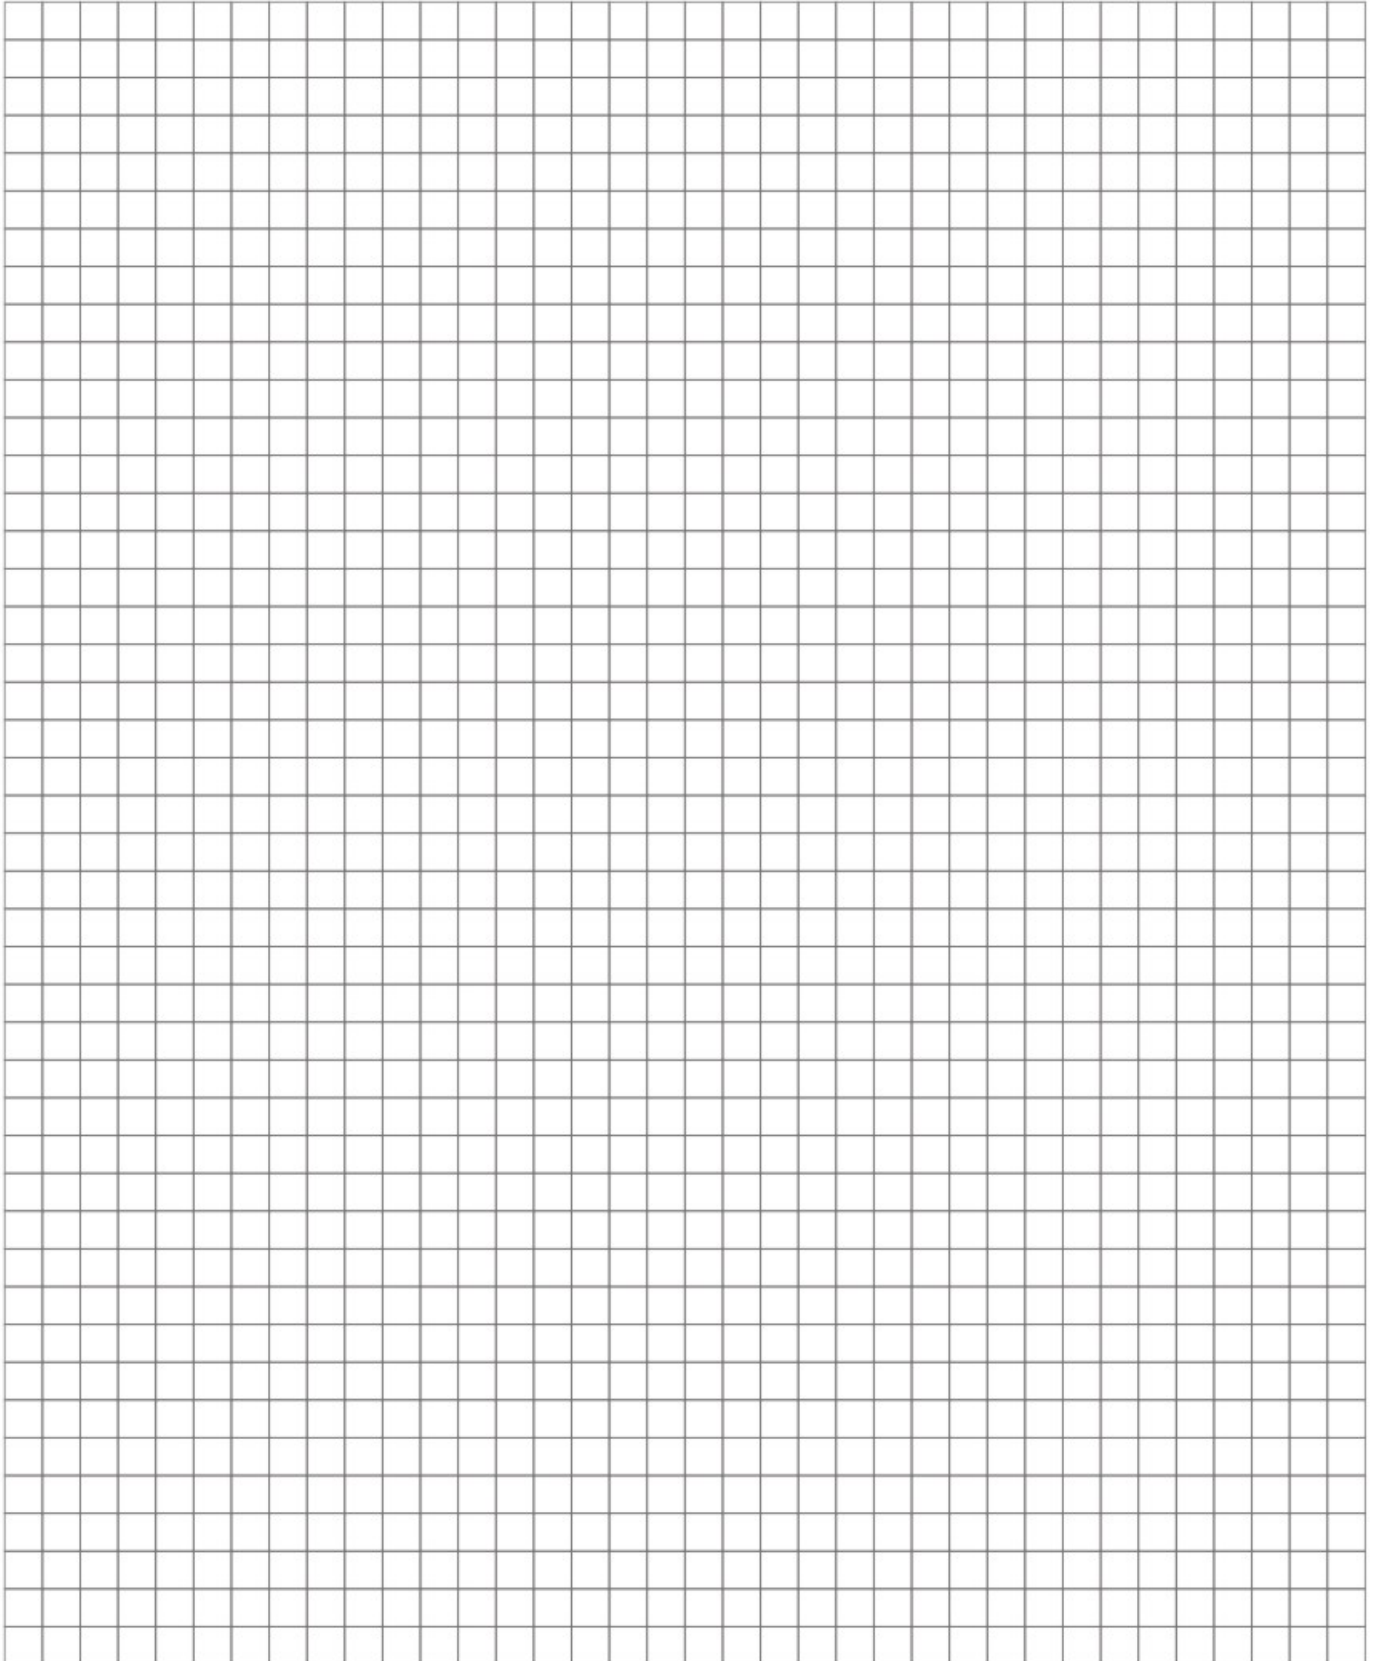

KVX-B065 1-stage

			1-stage							
Ratio	i		3	4	5	6	7	8	9	10
Nominal Output Torque		Nm	56	52	52	50	50	45	42	42
		in.lb	496	460	460	443	443	398	372	372
Emergency Stop Torque	T_{2Max}	Nm	168	156	156	150	150	135	126	126
		in.lb	1487	1381	1381	1328	1328	1195	1115	1115
Maximum Acceleration Torque	T_{2a}	Nm	100.8	93.6	93.6	90	90	81	75.6	75.6
		in.lb	892	828	828	797	797	717	669	669
Maximum Torque	T_{2a}	Nm	112	104	104	100	100	90	84	84
		in.lb	991	920	920	885	885	797	743	743
Permitted Average Input Speed	n_{1a}	rpm	3000							
Maximum Input Speed	n_{1Max}	rpm	6000							
Mean No Load Running Torque	T_{012}	Nm	0.29	0.25	0.22	0.2	0.2	0.2	0.2	0.2
		in.lb	2.57	2.21	1.95	1.77	1.77	1.77	1.77	1.77
Standard Backlash P1	j_s	arcmin	≤7							
Reduced Low Backlash P0	j_s	arcmin	≤5							
Ultra Low Backlash PU	j_s	arcmin	≤3							
Torsional Rigidity	C_{121}	Nm/arcmin	7							
		in.lb/arcmin	61.95							
Maximum Radial Load	F_{2aMax}	N	1500							
		lb _r	337							
Maximum Axial Load	F_{2cMax}	N	760							
		lb _r	171							
Max. Tilting Moment	M_{2aMax}	Nm	90							
		in.lb	797							
Mass Moment of Inertia	j_1	kgcm ²	0.160	0.140	0.130	0.130	0.130	0.130	0.130	0.130
Operating Noise Level	L_{pk}	dB(A)	< 63							
Efficiency at Full loading	η	%	95							
Operating Temperature		°C	-25 to +90							
		F	-13 to +194							
Lubrication			Synthetic Lubrication Grease							
Mouting Position			Any Directions							
Protection Class			IP 65							
Service lifetime	L_h	h	20,000(Continuous Operation)							
Weight	m	kg	2.2							
		lb _m	4.8							

KVX-B065 2-stage

		2-stage														
Ratio	i		15	20	25	30	35	40	45	50	60	70	80	90	100	
Nominal Output Torque		Nm	56	52	52	52	52	52	52	52	50	50	45	42	42	
		in.lb	496	460	460	460	460	460	460	460	460	443	443	398	372	372
Emergency Stop Torque	T_{2Max}	Nm	168	156	156	156	156	156	156	156	156	150	150	135	126	126
		in.lb	1487	1381	1381	1381	1381	1381	1381	1381	1381	1328	1328	1195	1115	1115
Maximum Acceleration Torque	T_{2B}	Nm	100.8	93.6	93.6	93.6	93.6	93.6	93.6	93.6	90	90	81	75.6	75.6	
		in.lb	892	828	828	828	828	828	828	828	828	797	797	717	669	669
Maximum Torque	T_{2a}	Nm	112	104	104	104	104	104	104	104	100	100	90	84	84	
		in.lb	991	920	920	920	920	920	920	920	920	885	885	797	743	743
Permitted Average Input Speed	n_{1M}	rpm	3000													
Maximum Input Speed	n_{1Max}	rpm	6000													
Mean No Load Running Torque	T_{012}	Nm	0.22	0.22	0.22	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
		in.lb	1.95	1.95	1.95	1.77	1.77	1.77	1.77	1.77	1.77	1.77	1.77	1.77	1.77	1.77
Standard Backlash P1	j_1	arcmin	≤9													
Reduced Low Backlash P0	j_1	arcmin	≤7													
Ultra Low Backlash PU	j_1	arcmin	≤5													
Torsional Rigidity	C_{121}	Nm/arcmin	7													
		in.lb/arcmin	61.95													
Maximum Radial Load	$F_{2RadMax}$	N	1500													
		lb _f	337													
Maximum Axial Load	F_{2AMax}	N	760													
		lb _f	171													
Max. Tilting Moment	$M_{2TiltMax}$	Nm	90													
		in.lb	797													
Mass Moment of Inertia	j_1	kgcm ²	0.075	0.075	0.075	0.064	0.064	0.064	0.064	0.064	0.064	0.064	0.075	0.064	0.064	0.064
Operating Noise Level	L_{PA}	dB(A)	< 63													
Efficiency at Full loading	η	%	93													
Operating Temperature		°C	-25 to +90													
		F	-13 to +194													
Lubrication			Synthetic Lubrication Grease													
Mouting Position			Any Directions													
Protection Class			IP 65													
Service lifetime	L_{1h}	h	20,000(Continuous Operation)													
Weight	m	kg	2.4													
		lb _m	5.28													

KVX-B085 1-stage

			1-stage							
Ratio	i		3	4	5	6	7	8	9	10
Nominal Output Torque		Nm	160	145	155	145	145	142	142	142
		in.lb	1416	1283	1372	1283	1283	1257	1257	1257
Emergency Stop Torque	T_{290t}	Nm	480	435	465	435	435	426	426	426
		in.lb	4248	3850	4116	3850	3850	3770	3770	3770
Maximum Acceleration Torque	T_{23}	Nm	288	261	279	261	261	255.6	255.6	255.6
		in.lb	2549	2310	2469	2310	2310	2262	2262	2262
Maximum Torque	T_{23}	Nm	320	290	310	290	290	284	284	284
		in.lb	2832	2567	2744	2567	2567	2514	2514	2514
Permitted Average Input Speed	n_{1N}	rpm	3000							
Maximum Input Speed	n_{1Max}	rpm	6000							
Mean No Load Running Torque	T_{012}	Nm	0.43	0.41	0.36	0.34	0.3	0.3	0.3	0.3
		in.lb	3.81	3.63	3.19	3.01	2.66	2.66	2.66	2.66
Standard Backlash P1	j_s	arcmin	≤7							
Reduced Low Backlash P0	j_s	arcmin	≤5							
Ultra Low Backlash PU	j_s	arcmin	≤3							
Torsional Rigidity	C_{121}	Nm/arcmin	14							
		in.lb/arcmin	123.91							
Maximum Radial Load	F_{23Max}	N	3200							
		lb _f	719							
Maximum Axial Load	F_{23Max}	N	1600							
		lb _f	360							
Max. Tilting Moment	M_{290Max}	Nm	214							
		in.lb	1894							
Mass Moment of Inertia	j_1	kgcm ²	0.61	0.48	0.47	0.47	0.47	0.45	0.44	0.44
Operating Noise Level	L_{pk}	dB(A)	< 65							
Efficiency at Full loading	η	%	95							
Operating Temperature		°C	-25 to +90							
		F	-13 to +194							
Lubrication			Synthetic Lubrication Grease							
Mouting Position			Any Directions							
Protection Class			IP 65							
Service lifetime	L_h	h	20,000(Continuous Operation)							
Weight	m	kg	5.3							
		lb _m	11.7							

KVX-B085 2-stage

			2-stage												
Ratio	i		15	20	25	30	35	40	45	50	60	70	80	90	100
Nominal Output Torque		Nm	160	145	155	155	155	155	155	155	145	145	142	142	142
		in.lb	1416	1283	1372	1372	1372	1372	1372	1372	1372	1283	1283	1257	1257
Emergency Stop Torque	T_{2Max}	Nm	480	435	465	465	465	465	465	465	435	435	426	426	426
		in.lb	4248	3850	4116	4116	4116	4116	4116	4116	3850	3850	3770	3770	3770
Maximum Acceleration Torque	T_{2B}	Nm	288	261	279	279	279	279	279	279	261	261	255.6	255.6	255.6
		in.lb	2549	2310	2469	2469	2469	2469	2469	2469	2310	2310	2262	2262	2262
Maximum Torque	T_{2a}	Nm	320	290	310	310	310	310	310	310	290	290	284	284	284
		in.lb	2832	2567	2744	2744	2744	2744	2744	2744	2567	2567	2514	2514	2514
Permitted Average Input Speed	n_{1N}	rpm	3000												
Maximum Input Speed	n_{1Max}	rpm	6000												
Mean No Load Running Torque	T_{012}	Nm	0.36	0.36	0.36	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3
		in.lb	3.19	3.19	3.19	2.66	2.66	2.66	2.66	2.66	2.66	2.66	2.66	2.66	2.66
Standard Backlash P1	j_i	arcmin	≤9												
Reduced Low Backlash P0	j_i	arcmin	≤7												
Ultra Low Backlash PU	j_i	arcmin	≤5												
Torsional Rigidity	C_{121}	Nm/arcmin	14												
		in.lb/arcmin	123.91												
Maximum Radial Load	$F_{2RadMax}$	N	3200												
		lb _f	719												
Maximum Axial Load	F_{2AMax}	N	1600												
		lb _f	360												
Max. Tilting Moment	$M_{2TilMax}$	Nm	214												
		in.lb	1894												
Mass Moment of Inertia	j_1	kgcm ²	0.44	0.44	0.44	0.39	0.39	0.39	0.39	0.39	0.39	0.39	0.44	0.39	0.44
Operating Noise Level	L_{PA}	dB(A)	< 65												
Efficiency at Full loading	η	%	93												
Operating Temperature		°C	-25 to +90												
		F	-13 to +194												
Lubrication			Synthetic Lubrication Grease												
Mouting Position			Any Directions												
Protection Class			IP 65												
Service lifetime	L_h	h	20,000(Continuous Operation)												
Weight	m	kg	7												
		lb _m	14.3												

KVX-B115 1-stage

			1-stage							
Ratio	i		3	4	5	6	7	8	9	10
Nominal Output Torque		Nm	335	300	320	300	300	295	295	295
		in.lb	2965	2655	2832	2655	2655	2611	2611	2611
Emergency Stop Torque	T_{2Max}	Nm	1005	900	960	900	900	885	885	885
		in.lb	8895	7966	8497	7966	7966	7833	7833	7833
Maximum Acceleration Torque	T_{2a}	Nm	603	540	576	540	540	531	531	531
		in.lb	5337	4779	5098	4779	4779	4700	4700	4700
Maximum Torque	T_{2a}	Nm	670	600	640	600	600	590	590	590
		in.lb	5930	5310	5664	5310	5310	5222	5222	5222
Permitted Average Input Speed	n_{1N}	rpm	3000							
Maximum Input Speed	n_{1Max}	rpm	6000							
Mean No Load Running Torque	T_{012}	Nm	1.2	1.15	1.05	1.01	0.98	0.98	0.98	0.98
		in.lb	10.62	10.18	9.29	8.94	8.67	8.67	8.67	8.67
Standard Backlash P1	j_s	arcmin	≤7							
Reduced Low Backlash P0	j_s	arcmin	≤5							
Ultra Low Backlash PU	j_s	arcmin	≤3							
Torsional Rigidity	C_{121}	Nm/arcmin	26							
		in.lb/arcmin	230.12							
Maximum Radial Load	F_{2Max}	N	6700							
		lb _f	1506							
Maximum Axial Load	F_{2CMax}	N	3300							
		lb _f	742							
Max. Tilting Moment	M_{2Max}	Nm	603							
		in.lb	5337							
Mass Moment of Inertia	j_1	kgcm ²	3.25	2.74	2.71	2.71	2.62	2.62	2.62	2.57
Operating Noise Level	L_{pk}	dB(A)	< 68							
Efficiency at Full loading	η	%	95							
Operating Temperature		°C	-25 to +90							
		F	-13 to +194							
Lubrication			Synthetic Lubrication Grease							
Mouting Position			Any Directions							
Protection Class			IP 65							
Service lifetime	L_h	h	20,000(Continuous Operation)							
Weight	m	kg	9							
		lb _m	19.8							

KVX-B115 2-stage

		2-stage														
Ratio	i		15	20	25	30	35	40	45	50	60	70	80	90	100	
Nominal Output Torque		Nm	335	300	320	320	320	320	320	320	300	300	295	295	295	
		in.lb	2965	2655	2832	2832	2832	2832	2832	2832	2832	2655	2655	2611	2611	2611
Emergency Stop Torque	T_{2Max}	Nm	1005	900	960	960	960	960	960	960	900	900	885	885	885	
		in.lb	8895	7966	8497	8497	8497	8497	8497	8497	8497	7966	7966	7833	7833	7833
Maximum Acceleration Torque	T_{2B}	Nm	603	540	576	576	576	576	576	576	540	540	531	531	531	
		in.lb	5337	4779	5098	5098	5098	5098	5098	5098	5098	4779	4779	4700	4700	4700
Maximum Torque	T_{2a}	Nm	670	600	640	640	640	640	640	640	600	600	590	590	590	
		in.lb	5930	5310	5664	5664	5664	5664	5664	5664	5664	5310	5310	5222	5222	5222
Permitted Average Input Speed	n_{1N}	rpm	3000													
Maximum Input Speed	n_{1Max}	rpm	6000													
Mean No Load Running Torque	T_{012}	Nm	1.05	1.05	1.05	0.98	0.98	0.98	0.98	0.98	0.98	0.98	0.98	0.98	0.98	0.98
		in.lb	9.29	9.29	9.29	8.67	8.67	8.67	8.67	8.67	8.67	8.67	8.67	8.67	8.67	8.67
Standard Backlash P1	j_i	arcmin	≤9													
Reduced Low Backlash P0	j_i	arcmin	≤7													
Ultra Low Backlash PU	j_i	arcmin	≤5													
Torsional Rigidity	C_{121}	Nm/arcmin	26													
		in.lb/arcmin	230.12													
Maximum Radial Load	F_{2aMax}	N	6700													
		lb _r	1506													
Maximum Axial Load	F_{2GMax}	N	3300													
		lb _r	742													
Max. Tilting Moment	M_{2rMax}	Nm	603													
		in.lb	5337													
Mass Moment of Inertia	j_1	kgcm ²	1.5	1.5	1.49	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.53	1.53	1.49
Operating Noise Level	L_{PA}	dB(A)	< 68													
Efficiency at Full loading	η	%	93													
Operating Temperature		°C	-25 to +90													
		F	-13 to +194													
Lubrication			Synthetic Lubrication Grease													
Mouting Position			Any Directions													
Protection Class			IP 65													
Service lifetime	L_{10}	h	20,000(Continuous Operation)													
Weight	m	kg	13													
		lb _m	28.6													

KVX-B142 1-stage

			1-stage							
Ratio	i		3	4	5	6	7	8	9	10
Nominal Output Torque		Nm	630	550	620	600	575	550	510	510
		in.lb	5576	4868	5487	5310	5089	4868	4514	4514
Emergency Stop Torque	T_{2Max}	Nm	1890	1650	1860	1800	1725	1650	1530	1530
		in.lb	16728	14604	16462	15931	15267	14604	13542	13542
Maximum Acceleration Torque	T_{2a}	Nm	1134	990	1116	1080	1035	990	918	918
		in.lb	10037	8762	9877	9559	9160	8762	8125	8125
Maximum Torque	T_{2a}	Nm	1260	1100	1240	1200	1150	1100	1020	1020
		in.lb	11152	9736	10975	10621	10178	9736	9028	9028
Permitted Average Input Speed	n_{1N}	rpm	3000							
Maximum Input Speed	n_{1Max}	rpm	6000							
Mean No Load Running Torque	T_{012}	Nm	2.75	2.65	2.5	2.4	2.4	2.4	2.4	2.4
		in.lb	24.34	23.45	22.13	21.24	21.24	21.24	21.24	21.24
Standard Backlash P1	j_s	arcmin	≤7							
Reduced Low Backlash P0	j_s	arcmin	≤5							
Ultra Low Backlash PU	j_s	arcmin	≤3							
Torsional Rigidity	C_{121}	Nm/arcmin	52							
		in.lb/arcmin	460.24							
Maximum Radial Load	F_{2Max}	N	9600							
		lb _r	2158							
Maximum Axial Load	F_{2CMax}	N	4800							
		lb _r	1079							
Max. Tilting Moment	M_{2Max}	Nm	1275							
		in.lb	11285							
Mass Moment of Inertia	j_1	kgcm ²	12.31	7.54	7.42	7.42	7.25	7.14	7.14	7.14
Operating Noise Level	L_{pk}	dB(A)	< 70							
Efficiency at Full loading	η	%	95							
Operating Temperature		°C	-25 to +90							
		F	-13 to +194							
Lubrication			Synthetic Lubrication Grease							
Mouting Position			Any Directions							
Protection Class			IP 65							
Service lifetime	L_h	h	20,000(Continuous Operation)							
Weight	m	kg	26							
		lb _m	57.2							

KVX-B142 2-stage

		2-stage													
Ratio	i		15	20	25	30	35	40	45	50	60	70	80	90	100
Nominal Output Torque		Nm	630	550	620	620	620	620	620	620	600	575	550	510	510
		in.lb	5576	4868	5487	5487	5487	5487	5487	5487	5487	5310	5089	4868	4514
Emergency Stop Torque	T_{2Max}	Nm	1890	1650	1860	1860	1860	1860	1860	1860	1800	1725	1650	1530	1530
		in.lb	16728	14604	16462	16462	16462	16462	16462	16462	15931	15267	14604	13542	13542
Maximum Acceleration Torque	T_{2B}	Nm	1134	990	1116	1116	1116	1116	1116	1116	1080	1035	990	918	918
		in.lb	10037	8762	9877	9877	9877	9877	9877	9877	9559	9160	8762	8125	8125
Maximum Torque	T_{2a}	Nm	1260	1100	1240	1240	1240	1240	1240	1240	1200	1150	1100	1020	1020
		in.lb	11152	9736	10975	10975	10975	10975	10975	10975	10621	10178	9736	9028	9028
Permitted Average Input Speed	n_{1N}	rpm	3000												
Maximum Input Speed	n_{1Max}	rpm	6000												
Mean No Load Running Torque	T_{012}	Nm	2.6	2.6	2.6	2.6	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5
		in.lb	23.01	23.01	23.01	23.01	22.13	22.13	22.13	22.13	22.13	22.13	22.13	22.13	22.13
Standard Backlash P1	j_i	arcmin	≤9												
Reduced Low Backlash P0	j_i	arcmin	≤7												
Ultra Low Backlash PU	j_i	arcmin	≤5												
Torsional Rigidity	C_{121}	Nm/arcmin	52												
		in.lb/arcmin	460.24												
Maximum Radial Load	F_{2aMax}	N	9600												
		lb _r	2158												
Maximum Axial Load	F_{2GMax}	N	4800												
		lb _r	1079												
Max. Tilting Moment	M_{2rMax}	Nm	1275												
		in.lb	11285												
Mass Moment of Inertia	j_1	kgcm ²	7.47	6.65	5.81	6.34	5.36	4.08	5.36	4.08	4.08	4.08	7.4	7.3	7.3
Operating Noise Level	L_{PA}	dB(A)	< 70												
Efficiency at Full loading	η	%	93												
Operating Temperature		°C	-25 to +90												
		F	-13 to +194												
Lubrication			Synthetic Lubrication Grease												
Mouting Position			Any Directions												
Protection Class			IP 65												
Service lifetime	L_h	h	20,000(Continuous Operation)												
Weight	m	kg	31												
		lb _m	68.2												

KVX-B180 1-stage

			1-stage							
Ratio	i		3	4	5	6	7	8	9	10
Nominal Output Torque		Nm	1220	1170	1170	1100	1100	1060	1060	1060
		in.lb	10798	10355	10355	9736	9736	9382	9382	9382
Emergency Stop Torque	T_{290t}	Nm	3660	3510	3510	3300	3300	3180	3180	3180
		in.lb	32394	31066	31066	29207	29207	28145	28145	28145
Maximum Acceleration Torque	T_{2b}	Nm	2196	2106	2106	1980	1980	1908	1908	1908
		in.lb	19436	18640	18640	17524	17524	16887	16887	16887
Maximum Torque	T_{2a}	Nm	2440	2340	2340	2200	2200	2120	2120	2120
		in.lb	21596	20711	20711	19472	19472	18763	18763	18763
Permitted Average Input Speed	n_{1N}	rpm	1500							
Maximum Input Speed	n_{1Max}	rpm	3000							
Mean No Load Running Torque	T_{012}	Nm	3.9	3.8	3.55	3.4	3.4	3.4	3.4	3.4
		in.lb	34.52	33.63	31.42	30.09	30.09	30.09	30.09	30.09
Standard Backlash P1	j_s	arcmin	≤7							
Reduced Low Backlash P0	j_s	arcmin	≤5							
Ultra Low Backlash PU	j_s	arcmin	≤3							
Torsional Rigidity	C_{121}	Nm/arcmin	138							
		in.lb/arcmin	1221.40							
Maximum Radial Load	F_{2AMax}	N	14000							
		lb _f	3147							
Maximum Axial Load	F_{2CMax}	N	7000							
		lb _f	1574							
Max. Tilting Moment	M_{290Max}	Nm	2013							
		in.lb	17816							
Mass Moment of Inertia	j_1	kgcm ²	28.98	23.67	22.75	22.75	22.48	22.59	22.59	22.55
Operating Noise Level	L_{pk}	dB(A)	< 72							
Efficiency at Full loading	η	%	95							
Operating Temperature		°C	-25 to +90							
		F	-13 to +194							
Lubrication			Synthetic Lubrication Grease							
Mouting Position			Any Directions							
Protection Class			IP 65							
Service lifetime	L_h	h	20,000(Continuous Operation)							
Weight	m	kg	41							
		lb _m	90.2							

KVX-B180 2-stage

		2-stage														
Ratio	i		15	20	25	30	35	40	45	50	60	70	80	90	100	
Nominal Output Torque		Nm	1220	1170	1170	1170	1170	1170	1170	1170	1100	1100	1060	1060	1060	
		in.lb	10798	10355	10355	10355	10355	10355	10355	10355	9736	9736	9382	9382	9382	
Emergency Stop Torque	T_{2Max}	Nm	3660	3510	3510	3510	3510	3510	3510	3510	3300	3300	3180	3180	3180	
		in.lb	32394	31066	31066	31066	31066	31066	31066	31066	29207	29207	28145	28145	28145	
Maximum Acceleration Torque	T_{2B}	Nm	2196	2106	2106	2106	2106	2106	2106	2106	1980	1980	1908	1908	1908	
		in.lb	19436	18640	18640	18640	18640	18640	18640	18640	17524	17524	16887	16887	16887	
Maximum Torque	T_{2a}	Nm	2440	2340	2340	2340	2340	2340	2340	2340	2200	2200	2120	2120	2120	
		in.lb	21596	20711	20711	20711	20711	20711	20711	20711	19472	19472	18763	18763	18763	
Permitted Average Input Speed	n_{1N}	rpm	1500													
Maximum Input Speed	n_{1Max}	rpm	3000													
Mean No Load Running Torque	T_{012}	Nm	2.7	2.7	2.7	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	
		in.lb	23.90	23.90	23.90	23.01	23.01	23.01	23.01	23.01	23.01	23.01	23.01	23.01	23.01	
Standard Backlash P1	j_i	arcmin	≤9													
Reduced Low Backlash P0	j_i	arcmin	≤7													
Ultra Low Backlash PU	j_i	arcmin	≤5													
Torsional Rigidity	C_{121}	Nm/arcmin	138													
		in.lb/arcmin	1221.40													
Maximum Radial Load	$F_{2RadMax}$	N	14000													
		lb _r	3147													
Maximum Axial Load	F_{2AMax}	N	7000													
		lb _a	1574													
Max. Tilting Moment	$M_{2TilMax}$	Nm	2013													
		in.lb	17816													
Mass Moment of Inertia	j_1	kgcm ²	7.42	7.42	7.54	7.14	7.14	22.55	7.14	7.14	7.14	7.14	7.54	7.54	7.42	
Operating Noise Level	L_{PA}	dB(A)	< 72													
Efficiency at Full loading	η	%	93													
Operating Temperature		°C	-25 to +90													
		F	-13 to +194													
Lubrication			Synthetic Lubrication Grease													
Mouting Position			Any Directions													
Protection Class			IP 65													
Service lifetime	L_{10}	h	20,000(Continuous Operation)													
Weight	m	kg	49													
		lb _m	107.8													


KVX-B220 1-stage

			1-stage							
Ratio	i		3	4	5	6	7	8	9	10
Nominal Output Torque		Nm	2050	2000	2000	1900	1900	1800	1800	1800
		in.lb	18144	17701	17701	16816	16816	15931	15931	15931
Emergency Stop Torque	T_{290t}	Nm	6150	6000	6000	5700	5700	5400	5400	5400
		in.lb	54432	53104	53104	50449	50449	47794	47794	47794
Maximum Acceleration Torque	T_{2a}	Nm	3690	3600	3600	3420	3420	3240	3240	3240
		in.lb	32659	31863	31863	30269	30269	28676	28676	28676
Maximum Torque	T_{2a}	Nm	4100	4000	4000	3800	3800	3600	3600	3600
		in.lb	36288	35403	35403	33633	33633	31863	31863	31863
Permitted Average Input Speed	n_{1a}	rpm	1500							
Maximum Input Speed	n_{1Max}	rpm	3000							
Mean No Load Running Torque	T_{012}	Nm	5.6	5.4	5.25	5.07	5.07	5.07	5.07	5.07
		in.lb	49.56	47.79	46.47	44.87	44.87	44.87	44.87	44.87
Standard Backlash P1	j_s	arcmin	≤7							
Reduced Low Backlash P0	j_s	arcmin	≤5							
Ultra Low Backlash PU	j_s	arcmin	≤3							
Torsional Rigidity	C_{121}	Nm/arcmin	220							
		in.lb/arcmin	1947.15							
Maximum Radial Load	F_{2aMax}	N	16000							
		lb _f	3597							
Maximum Axial Load	F_{2cMax}	N	8000							
		lb _f	1798							
Max. Tilting Moment	M_{290Max}	Nm	2676							
		in.lb	23684							
Mass Moment of Inertia	j_1	kgcm ²	69.61	54.37	53.27	53.27	50.84	50.84	50.84	50.56
Operating Noise Level	L_{pk}	dB(A)	< 75							
Efficiency at Full loading	η	%	95							
Operating Temperature		°C	-25 to +90							
		F	-13 to +194							
Lubrication			Synthetic Lubrication Grease							
Mouting Position			Any Directions							
Protection Class			IP 65							
Service lifetime	L_h	h	20,000(Continuous Operation)							
Weight	m	kg	68							
		lb _m	149.6							

KVX-B220 2-stage

			2-stage												
Ratio	i		15	20	25	30	35	40	45	50	60	70	80	90	100
Nominal Output Torque		Nm	2050	2000	2000	2000	2000	2000	2000	2000	1900	1900	1800	1800	1800
		in.lb	18144	17701	17701	17701	17701	17701	17701	17701	17701	16816	16816	15931	15931
Emergency Stop Torque	T_{2Max}	Nm	6150	6000	6000	6000	6000	6000	6000	6000	5700	5700	5400	5400	5400
		in.lb	54432	53104	53104	53104	53104	53104	53104	53104	50449	50449	47794	47794	47794
Maximum Acceleration Torque	T_{2B}	Nm	3690	3600	3600	3600	3600	3600	3600	3600	3420	3420	3240	3240	3240
		in.lb	32659	31863	31863	31863	31863	31863	31863	31863	30269	30269	28676	28676	28676
Maximum Torque	T_{2a}	Nm	4100	4000	4000	4000	4000	4000	4000	4000	3800	3800	3600	3600	3600
		in.lb	36288	35403	35403	35403	35403	35403	35403	35403	33633	33633	31863	31863	31863
Permitted Average Input Speed	n_{1N}	rpm	1500												
Maximum Input Speed	n_{1Max}	rpm	3000												
Mean No Load Running Torque	T_{012}	Nm	3.55	3.55	3.55	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4
		in.lb	31.42	31.42	31.42	30.09	30.09	30.09	30.09	30.09	30.09	30.09	30.09	30.09	30.09
Standard Backlash P1	j_i	arcmin	≤9												
Reduced Low Backlash P0	j_i	arcmin	≤7												
Ultra Low Backlash PU	j_i	arcmin	≤5												
Torsional Rigidity	C_{121}	Nm/arcmin	220												
		in.lb/arcmin	1947.15												
Maximum Radial Load	F_{2aMax}	N	16000												
		lb _r	3597												
Maximum Axial Load	F_{2GMax}	N	8000												
		lb _r	1798												
Max. Tilting Moment	M_{2rMax}	Nm	2676												
		in.lb	23684												
Mass Moment of Inertia	j_1	kgcm ²	22.75	22.75	22.75	22.59	22.59	22.59	22.59	22.59	22.59	22.75	22.75	22.59	22.59
Operating Noise Level	L_{PA}	dB(A)	< 75												
Efficiency at Full loading	η	%	93												
Operating Temperature		°C	-25 to +90												
		F	-13 to +194												
Lubrication			Synthetic Lubrication Grease												
Mouting Position			Any Directions												
Protection Class			IP 65												
Service lifetime	L_h	h	20,000(Continuous Operation)												
Weight	m	kg	78												
		lb _m	171.6												

KVX-B Dimensions

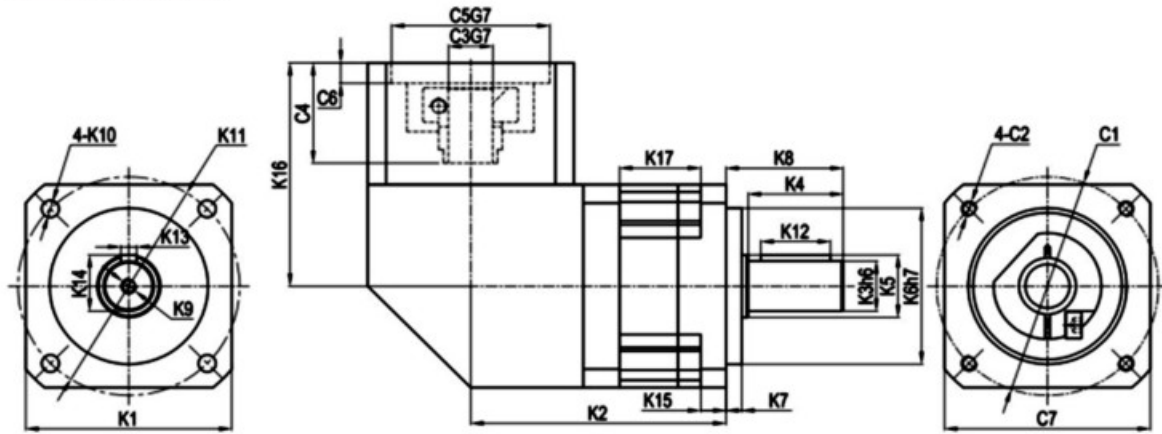

Model	KVX-B065		KVX-B085		KVX-B115		KVX-B142		KVX-B180		KVX-B220	
Stage	1	2	1	2	1	2	1	2	1	2	1	2
K1	65		85		110		142		180		220	
	2.559		3.346		4.331		5.591		7.087		8.661	
K2	93	116.7	105.2	136.5	154	195.8	187	248	204.5	251.5	220	285.5
	3.661	4.594	4.142	5.374	6.063	7.709	7.362	9.764	8.051	9.902	8.661	11.240
K3	16		22		32		40		55		75	
	0.630		0.866		1.260		1.575		2.165		2.953	
K4	30		36		50		80		82		105	
	1.181		1.417		1.969		3.150		3.228		4.134	
K5	20		25		40		55		60		85	
	0.787		0.984		1.575		2.165		2.362		3.346	
K6	50		80		110		130		160		180	
	1.969		3.150		4.331		5.118		6.299		7.087	
K7	5		10		12		15		20		30	
	0.197		0.394		0.472		0.591		0.787		1.181	
K8	37		48		65		97		105		138	
	1.457		1.890		2.559		3.819		4.134		5.433	
K9	M5X12		M6X16		M10X22		M12X26		M20X40		M20X40	
K10	5.5		6.5		9		11		13		17	
	0.217		0.256		0.354		0.433		0.512		0.669	
K11	70		100		130		165		215		250	
	2.756		3.937		5.118		6.496		8.465		9.843	
K12	22		28		40		70		70		90	
	0.866		1.102		1.575		2.756		2.756		3.543	
K13	5		6		10		12		16		20	
	0.197		0.236		0.394		0.472		0.630		0.787	
K14	18		24.5		35		43		59		79.5	
	0.709		0.965		1.378		1.693		2.323		3.130	
K15	8		10		14		15		20		20	
	0.315		0.394		0.551		0.591		0.787		0.787	
K16	83		94		140		169		204	169	210	204
	3.248		3.701		5.512		6.654		8.031	6.654	8.268	8.031
K17	37.6	61.3	39.7	66	60	101.8	80	141	69		81	
	1.480	2.413	1.563	2.598	2.362	4.008	3.150	5.551	2.7		3.2	
C1	70		90		145		200		215	200	235	215
	2.756		3.543		5.709		7.874		8.465	7.874	9.252	8.465
C2	M5X12		M6X15		M8X20		M12X12		M12X25	M12X25	M12X25	M12X25
C3	14		19		24		35		42	35	42	35
	0.551		0.748		0.945		1.378		1.654	1.378	1.654	1.378
C4	32.1		41.3		61.3		81.3		82.5	81.3	116	82.5
	1.264		1.626		2.413		3.201		3.248	3.201	4.567	3.248
C5	50		70		110		114.3		180	114.3	200	180
	1.969		2.756		4.331		4.500		7.087	4.500	7.874	7.087
C6	6.5		6.5		8		6.5		8	8	8	8
	0.256		0.256		0.315		0.256		0.315	0.315	0.315	0.315
C7	65		85		120		175		190	175	220	190
	2.559		3.346		4.724		6.890		7.480	6.890	8.661	7.480

The dimensions modified as per the applied motor flanges.
 You can get the specific gearbox drawing solution by KDP(Kofon Design Programme) on line from our website: www.kofon-motion.com

Technical Memo

